

INVISIBLE TUNABLE WHITE

1800K-5000K CCT Adjustable LED Tape Light




Fixture Type:

Catalog Number:

Project:

Location:

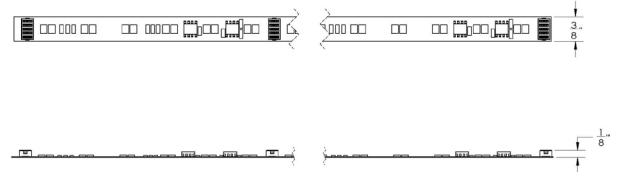

PRODUCT DESCRIPTION

Architectural grade white tape light that delivers precise color consistency and brightness throughout the strip. With a high lumen output, choose a color temperature anywhere from 1800K to 5000K for a unique and custom lighting effect. Its 10mm size allows it to be used variety of channels for a wide range of applications.

FEATURES

- Tune to desired CCT and intensity from 1800K to 5000K with DMX/RDM mobile app, and WAC wallstation
- Ultra thin 1/8" profile
- May be cut and easily reconnected every 4"
- 90' max run of 20 AWG wire between DMX LED controller and beginning of the tape with shielded data cable
- Strong adhesive bonding with 3M VHB adhesive
- Gold plated connector protects from corrosion, heat and ensures a reliable connection

SPECIFICATIONS

- Construction:** Flexible strip light
- Cutting Interval:** 4"
- Input:** 24VDC
- Lumens:** Up to 328 lm/ft
- Control:** Through CTR-WDMX-3CH Wireless DMX Controller
- Dimming:** Through wall controller: LED-WCT-WT, and WAC mobile app
- CRI:** 90+
- McAdams Steps:** 3
- Color Temp:** 1800K - 5000K
- Rated Life:** 50,000 hours
- Operating Temp:** -4°F to 104°F (-20°C to 40°C)
- Standard:** UL & cUL listed, Damp Location listed, Title 24 Compliant

TAPE SELECTIONS

System	Max Lumens	Max Run	Power	Length (in feet)				Color Temp	Finish	
				01	05	10	15		WT	White
T24-TW3	328	16 ft	6 W/ft	01	05	10	15	1850 1800K - 5000K	WT	White

Example: **T24-TW3-15-1850WT**

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050










Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760


INVISILED TUNABLE WHITE



1800K-5000K CCT Adjustable LED Tape Light




	MODEL	Finish			
	T24-MM-WT	White	Tape to Tape Connector Connects tape sections		
	T24-TI-WT	White	Tape to Tape T Connector Connects tape sections		
	T24-XI-WT	White	Tape to Tape X Connector Connects power feed to tape section		
	T24-LI-WT	White	Tape to Tape L Connector Connects tape sections		
	T24-FF-WT	White	Joiner Cable Extender Connects joiner cable to joiner cable, female on both sides		
	T24-Y-WT T24-Y-BK	White Black	Flex Tape to Tape Y Connector Connects tape sections		
	T24-X-WT T24-X-BK	White Black	Flex Tape to Tape X Connector Connects tape sections		
	T24-IC-002 T24-IC-006 T24-IC-012 T24-IC-036 T24-IC-072 T24-IC-144 T24-IC-240	WT White BK Black	In Wall Rated Joiner Cable Connects tape sections, 2 male ends	2 in 6 in 1 ft 3 ft 6 ft 12 ft 20 ft	Example: T24-IC-002-WT
	T24-EX3-072 T24-EX3-144 T24-EX3-240 T24-EX3-1200	WT White BK Black	In Wall Rated Extension Cable Extends distance between a hard wire power supply or a wiring box to a tape section	6 ft 12 ft 20 ft 100 ft	Example: T24-EX3-072-WT

LED Controller / Power Supplies / User Interface Controller (REQUIRED)

LED Controller	MODEL	Input	Output	Dimension	
	CTR-WDMX-3CH	3 X 24VDC 96W or 1 X 24VDC 300W	3 X 24VDC 96W	7 7/8" x 3 7/8" x 1 19/16"	UL Listed Class 2 Output 3 DMX/RDM Individual Addressable Output Channels DMX Port RJ45/XLR 3 Pins / Phoenix Connector Support both RGBWW / Tunable White Wireless interface with WAC mobile app and cloud access control
Includes: 3 pcs T24-EX3-072-WT					

Power Supplies	MODEL	Input	Output	Dimension	
	PS-24DC-U96R-S6	120-277VAC	24VDC, 96W	7 7/8" x 3 7/8" x 1 13/16"	UL Listed Class 2 Output 5 Years Warranty Output 6' lead wires
	PS-24DC-U300R	120-277VAC	24VDC, 300W	11 3/8" x 5 1/8" x 1 19/20"	300W Output UL Listed, Class P, Type HL 5 Year Warranty Input 6', Output 3' lead wires

User Interface Controller	MODEL	Input	Output	Dimension	
	LED-WCT-WT	120-230VAC	N/A	4 5/8" x 2 3/4" x 1 5/8"	Wallstation Multi-scene selection, Raise/Lower, dedicated Off button Suitable for standard single NEMA wall box Setup and configuration via WAC mobile application, no physical adjustment needed cUL listed

INVISIBLE TUNABLE WHITE

1800K-5000K CCT Adjustable LED Tape Light



POWER CONSUMPTION AND MAXIMUM RUN

Tape power consumption depends on the color and dimming level. A lookup table below shows an actual recorded data of maximum light output at particular CCT with 96W power supply. Due to power consumption variation, please consider to use 6 W/ft for layout planning to maximize CCT adjustable range.

CCT (K)	Power (W)	Max Run (ft)	Lumen	DMX Value			
				CH1: 1800K	CH2: 2700K	CH3: 5000K	CH4: 18/27/50
1800	4.61	20	234	255	0	0	255
1900	5.65	16	296	253	60	0	255
2000	5.65	16	300	196	110	0	255
2100	5.64	17	302	152	152	0	255
2200	5.63	17	300	110	196	0	255
2300	5.62	17	301	82	228	0	255
2400	5.58	17	297	55	255	0	255
2500	4.93	19	261	17	255	0	255
2600	4.70	20	249	5	255	0	255
2700	4.70	20	251	0	255	0	255
2800	5.00	19	271	0	255	21	255
2900	5.26	18	289	0	255	35	255
3000	5.61	17	308	0	253	60	255
3100	5.65	17	313	0	236	77	255
3200	5.66	16	318	0	218	93	255
3300	5.57	17	314	0	194	115	255
3400	5.40	17	304	0	170	137	255
3500	5.64	17	319	0	162	145	255
3600	5.65	17	322	0	153	153	255
3700	5.65	17	322	0	145	162	255
3800	5.61	17	323	0	137	170	255
3900	5.64	17	325	0	110	198	255
4000	5.66	16	328	0	100	211	255
4100	5.64	17	325	0	86	225	255
4200	5.61	17	325	0	71	241	255
4300	5.62	17	326	0	60	253	255
4400	5.50	17	321	0	50	255	255
4500	5.33	18	311	0	40	255	255
4600	5.16	18	302	0	30	255	255
4700	4.99	19	291	0	21	255	255
4800	4.91	19	285	0	16	255	255
4900	4.77	20	277	0	9	255	255
5000	4.69	20	273	0	0	255	255

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

INVISILED TUNABLE WHITE

1800K-5000K CCT Adjustable LED Tape Light

WAC



Aluminum Channel **LED-T-CH** 5 feet
Additional End Caps **LED-T-CH-EC** 2 pcs

*Diffuses light from InvisILED® tape
 Includes a diffuser, two end caps, and five screws*



Deep Aluminum Channel **LED-T-CH1** 5 feet
Additional End Cap **LED-T-CH1-EC** 2 pcs

*Eliminates visible hot spots
 Includes a diffuser, two end caps, and five screws*



45° Angled Aluminum Channel **LED-T-CH2** 5 feet
Additional End Caps **LED-T-CH2-EC** 2 pcs

Includes a diffuser, two end caps, and five screws



Deep Aluminum Channel - Flood 54° Beam Angle **LED-T-CH3-FL** 5 feet
Additional End Cap **LED-T-CH1-EC** 2 pcs

Eliminates visible hot spots / 54° beam angles



Deep Aluminum Channel - Spot 9° Beam Angle **LED-T-CH3-SP** 5 feet
Additional End Cap **LED-T-CH1-EC** 2 pcs

Eliminates visible hot spots / 9° beam angles




Deep Aluminum Channel - Wide Flood 84° Beam Angle **LED-T-CH3-WF** 5 feet
Additional End Cap **LED-T-CH1-EC** 2 pcs

Eliminates visible hot spots / 84° beam angles



Fixed Angle Channel Clip **LED-T-CL3-PT**

Includes 2 pieces, 4 screws. Use to mount Aluminum Channel

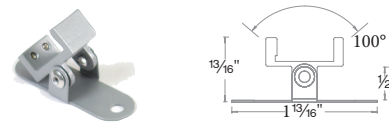

Adjustable Channel Clip **LED-T-CL2-PT**


Deep Aluminum Channel, 45° Angled Aluminum Channel

INDOOR MOUNTING ACCESSORIES



Aluminum Retrofit Channel **LED-T-RC** 3 feet

Can be bent to create fixed curves or used as a glare shield

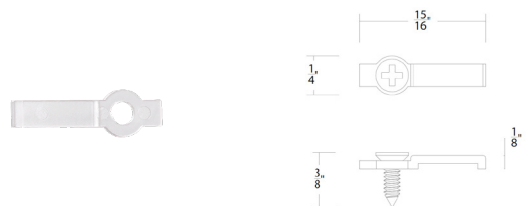


Plastic Mounting Clip **T24-CT-CL1** *Clear*

*For installation on non-flat surfaces
 Includes: 10 pcs plastic mounting clips and
 10 pcs screws*

INVISILED TUNABLE WHITE

1800K-5000K CCT Adjustable LED Tape Light

WAC

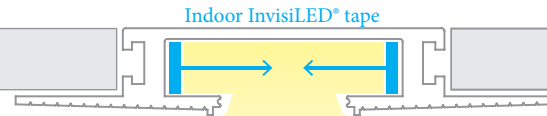


- Installs within $\frac{5}{8}$ " drywall depth
- Linear channel can be field cut
- Accommodates either one or two runs of InvisiLED® indoor tape
- Includes a translucent white acrylic diffuser
- Dense foam insert to be removed in installation after spackling

8ft Linear Channel

LED-T-RCH1-WT

- Includes: 1 diffuser
8 perforated metal sheets

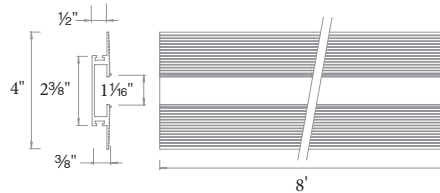


Power Feed

LED-T-RBOX1-WT

- The end cap may be placed on either side
Hanger bars may be installed on any side of the wiring box


- Kit includes: 1 wiring box
2 hanger bars
4 five-pin InvisiLED® adapters
2 end cap
1 diffuser
2 channel connector
1 counter sink drill bit
1 drill bit
1 installation tool

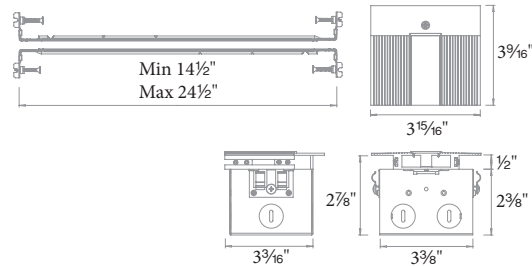

Lateral Corner

LED-T-CTC1-WT

- Includes: Diffuser
2 channel connectors
2 perforated metal sheets

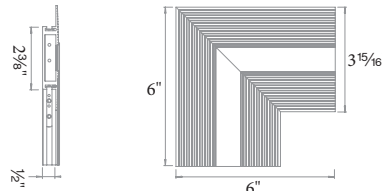


Perpendicular Corner

LED-T-WTC1-WT

- Transitions between walls or wall to ceiling

- Includes: Diffuser
2 channel connectors
2 perforated metal sheets

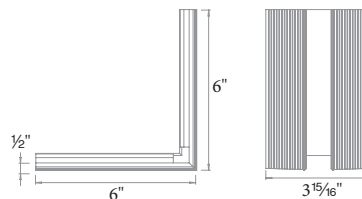


Outside Corner

LED-T-WTW1-WT


- Transitions around columns, bump outs, or soffits

- Includes: Diffuser
2 channel connectors
2 perforated metal sheets

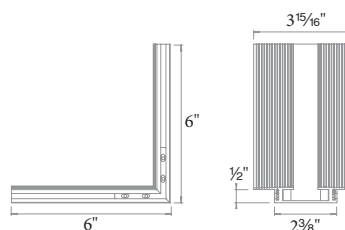

INVISILED TUNABLE WHITE



1800K-5000K CCT Adjustable LED Tape Light



Installs within 5/8" drywall depth
 Linear channel can be field cut
 Accommodates one run of InvisiLED® indoor tape
 Dense foam insert to be removed in installation after spackling
 Recommended installation within 15 inches of surface to be illuminated

8ft Linear Channel **LED-T-RCH2-WT**



Includes: 8 perforated metal sheets
 2 channel connectors

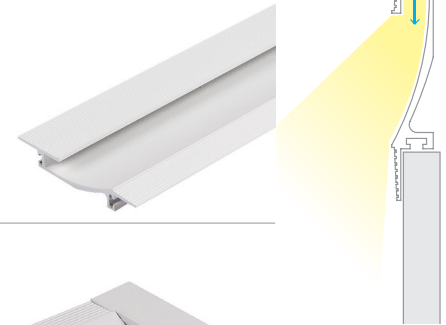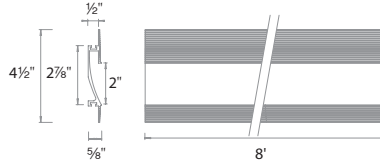


Power feed **LED-T-RBOX2-WT**

The end cap may be placed on either side
 Hanger bars may be installed on any side of the wiring box


Includes: 1 wiring box
 2 hanger bars
 2 five-pin InvisiLED® adapters
 2 end caps (left and right)
 2 channel connectors
 1 counter sink bit
 1 drill bit

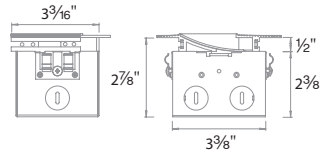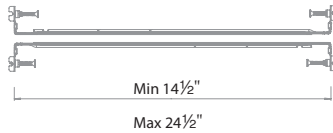

Indirect Recessed Channel

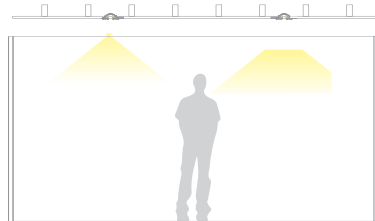


Linear channel can be field cut
 Accommodates up to four runs of InvisiLED® indoor tape
 Dense foam insert to be removed in installation after spackling
 Allows option to use different color InvisiLED® in one channel and switch them separately

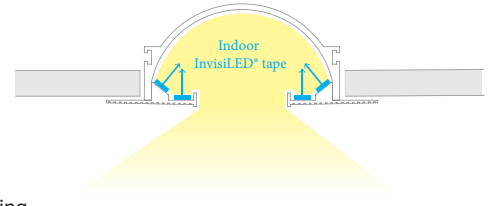

8ft Linear Channel **LED-T-RCH3-WT**

Includes: 10 perforated metal sheets
 2 channel connectors

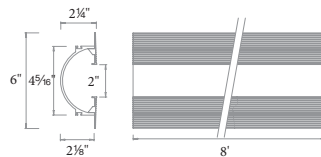

Power feed **LED-T-RBOX3-WT**

The end cap may be placed on either side
 Hanger bars may be installed on any side of the wiring box

Includes: 1 wiring box
 2 hanger bars
 4 five-pin InvisiLED® adapters
 1 end cap
 2 channel connectors
 1 counter sink drill bit
 1 drill bit

