

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Interlace

### Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-47828 28"	3000K 90	56.8W	4853	3263	CH Chrome

Example: **PD-47828-CH**

#### DESCRIPTION

Delicate bands of light weave playfully in and out on this flowing modern design. A continuous construction, a flexible diffuser, and powered aircraft cable suspension complete an overall clean, seamless look.

#### FEATURES

- Two seamless interlocked loops
- Thin powered cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	54000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body with flexible composite diffuser




#### FINISHES



Chrome

#### LINE DRAWING



Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Interlace Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-47839 39"	3000K 90	57.1W	4734	3241	CH Chrome

Example: **PD-47839-CH**

### DESCRIPTION

Delicate bands of light weave playfully in and out on this flowing modern design. A continuous construction, a flexible diffuser, and powered aircraft cable suspension complete an overall clean, seamless look.

### FEATURES

- Two seamless interlocked loops
- Thin powered cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	54000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body with flexible composite diffuser



### FINISHES



### LINE DRAWING

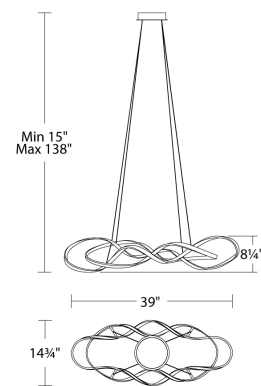

PD-47839