

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Geos 6" & 10" Ceiling Mount

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
FM-4606 6"	2700K 80	8W	551	270	BR Brushed Brass
	3000K 80	8W	608	300	TT Titanium
					WT White

Example: **FM-4606-27-BR**

- For 277V special order, add an "F" before the finish: FM-4610F-30-TT

### DESCRIPTION

Cutting-edge technology in the display industry transformed into a super-thin, less than an inch profile flush mount. Multiple mid-powered LED source illuminate the diffuser uniformly and without socket shadows common in conventional flush mounts.

### FEATURES


- Super thin, edge-lit LED panel at less than an inch thick
- High lumen package great for high ceiling applications
- Twist-lock quick install mechanism
- Transformer installed within the Junction Box, transformer dimension: 2.00" x 1.38" x 1.02"
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K, 2700K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI:</b>	80
<b>Dimming:</b>	ELV: 100 - 10%
<b>Rated Life:</b>	70000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard., Can be mounted on ceiling or wall in all orientations
<b>Standards:</b>	ETL, cETL
<b>Construction:</b>	Damp Location Listed Aluminum body with frosted acrylic diffuser



### FINISHES

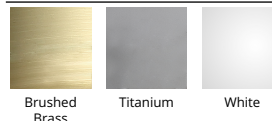

### LINE DRAWING

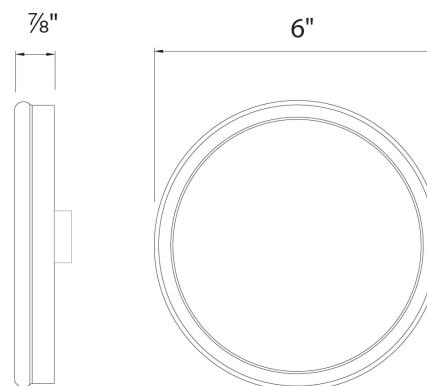

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Geos 6" & 10" Ceiling Mount

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
FM-4610 10"	2700K 80	12.5W	964	545	BR Brushed Brass
	3000K 80	12.5W	1064	600	TT Titanium WT White

Example: **FM-4610-27-BR**

- For 277V special order, add an "F" before the finish: FM-4610F-30-TT

### DESCRIPTION

Cutting-edge technology in the display industry transformed into a super-thin, less than an inch profile flush mount. Multiple mid-powered LED source illuminate the diffuser uniformly and without socket shadows common in conventional flush mounts.

### FEATURES


- Super thin, edge-lit LED panel at less than an inch thick
- High lumen package great for high ceiling applications
- Twist-lock quick install mechanism
- Transformer installed within the Junction Box, transformer dimension: 2.00" x 1.38" x 1.02"
- 5 year warranty

### SPECIFICATIONS

<b>Color Temp:</b>	3000K, 2700K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI:</b>	80
<b>Dimming:</b>	ELV: 100 - 10%
<b>Rated Life:</b>	70000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly. Safety cabling standard., Can be mounted on ceiling or wall in all orientations
<b>Standards:</b>	ETL, cETL
<b>Construction:</b>	Damp Location Listed Aluminum body with frosted acrylic diffuser



### FINISHES

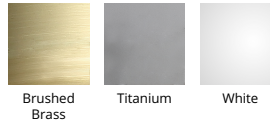

### LINE DRAWING

