

# WAC LIGHTING

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Charge 8020 16W H/J/L Track Luminaire

| System Type & Voltage               | Model | Color Temp & CRI | Lumens | CBCP | Finish  |
|-------------------------------------|-------|------------------|--------|------|---|
| H-120 VAC<br>J-120 VAC<br>L-120 VAC | 8020  | 30 3000K - 90    | 1280   | 1402 | BK Black<br>BN Brushed Nickel<br>DB Dark Bronze<br>WT White |

Example: **H-8020-30-BK**

### DESCRIPTION

The Charge 8020 track luminaire offers superior light output in a small, unobtrusive design. Developed for residential spaces and lower-mounted commercial applications.

### FEATURES


- 350° horizontal and 90° vertical aiming
- Driver concealed within the fixture
- 5 year warranty

### SPECIFICATIONS

|                        |  |
|------------------------|--|
| <b>Construction:</b>   | Die-cast aluminum with frosted TIR lens  |
| <b>Power:</b>          | 16W  |
| <b>Input:</b>          | 120 VAC, 50/60Hz   |
| <b>Dimming:</b>        | TRIAC: 100-5%, ELV: 100-5%   |
| <b>Light Source:</b>   | Integrated LED<br>3 Step Mac Adam Ellipse  |
| <b>Lens:</b>           | Frosted TIR Lens   |
| <b>Rated Life:</b>     | 50000 Hours  |
| <b>Finish:</b>         | Electrostatically Powder Coated Black,<br>Electrostatically Powder Coated Dark Bronze,<br>Electrostatically Powder Coated White,<br>Electroplated Brushed Nickel |
| <b>Operating Temp:</b> | -4°F to 104°F (-20°C to 40°C)  |
| <b>Standards:</b>      | ETL, cETL, Dry Location Listed, Energy Star 2.0,<br>Title 24 JA8-2016 Compliant  |



### FINISHES

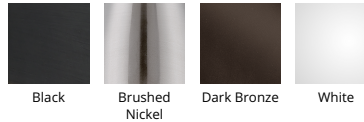

### LINE DRAWING

