WALL WASH - 3020W

Monopoint Luminaire

WAC LIGHTING

Responsible Lighting®




Fixture Type:

Catalog Number:

Project:

Location:



PRODUCT DESCRIPTION

LED luminaire with optimum light distribution for wall wash application

FEATURES

- 350° horizontal rotation and 90° vertical aiming
- Ceiling and wall mountable
- Integral LED and driver
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum **Input:** 120V 50/60 Hz

Power Consumption: 20W

Light Source: High output LED

Dimming: Electronic Low Voltage (ELV) 100% - 5% (120V only)

Finish: Powder coated

Standards: UL & cUL Damp Location Listed,

Title 24 JA8-2016 Compliant.

ORDER NUMBER

System	Model	Color	Temp	CRI	Lumens	Finis	h	
		927	2700K	90	885			
MO Monopoint	3020W	930	3000K	90	925	BK WT	Black White	
		935	3500K	90	1030			
		940	4000K	90	1035			

MO-3020W- -

Example: MO-3020W-930-BK


EXTENSIONS Custom order as a complete unit. Ceiling mount only.


X6 X12 X18 X24 X36 X48	6" 12" 18" 24" 36" 48"	MO3020W	927 930 935 940	BK WT	Extension 6"
---------------------------------------	---------------------------------------	---------	--------------------------	----------	---------------

Example: X12-MO3020W930WT

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 **Headquarters/Eastern Distribution Center** 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050 **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

LAYOUT GUIDE

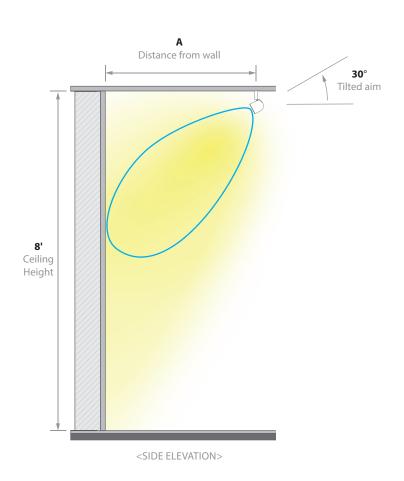

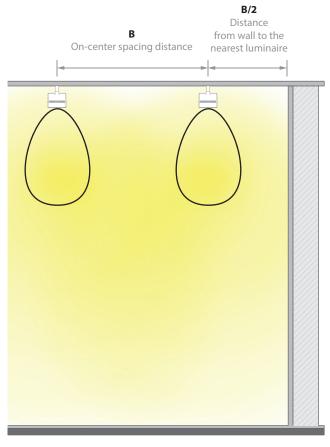

<BACK ELEVATION>

AVERAGE WALL ILLUMINANCE (3000K fixtures)

		В			
		On-center spacing distance			
		3 feet 5 feet			
A	3 feet	31 fc	25 fc		
Distance from wall	5 feet	20 fc	16 fc		

Results may vary depending on surface properties, ambient light levels, etc.

PHOTOMETRY

Shown when fixture is aimed towards the ground(nadir)

