

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Elementum Bathroom Sconce 2700K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
WS-7213 13"	2700K 90	BN Brushed Nickel	15.5W	1118	856	Yes
	2700K 90	BR Brushed Brass	15.5W	1118	856	Yes
	2700K 90	CH Chrome	15.5W	1118	856	Yes

Example: **WS-7213-BN**

- For 277V special order, add an "F" before the finish: WS-7230F-30-BN
- For alternate color temperature, special order adding -27 or -35: WS-7230F-30-BN

### DESCRIPTION

Updated with a warm brass finish, Elementum brings unparalleled task lighting into your bathroom, whether mounted vertically on either side of the mirror or above a vanity mirror for a flattering diffuse illumination.

### FEATURES


- A streamlined luminaire sealed to meet healthcare facility requirements
- 13" can only be mounted vertically
- Title 24 may not be available for all finishes, check for availability
- ACLED driverless technology
- 5 year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	2700K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100 - 10%
<b>Rated Life:</b>	80000 Hours
<b>Mounting:</b>	Can be mounted on wall in all orientations
<b>Standards:</b>	ETL, cETL, IP65, Title 24 JA8-2016 Compliant Wet Location Listed
<b>Construction:</b>	Aluminum hardware with mouth blown etched glass diffuser

### REPLACEMENT PARTS


RPL-GLA-7213 - Glass for WS-7213

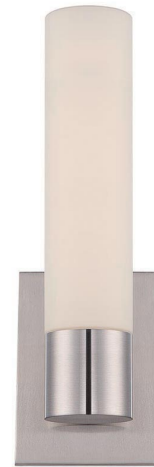

### FINISHES



### LINE DRAWING

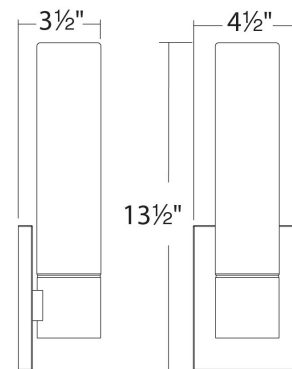

**WS-7213**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Elementum Bathroom Sconce 2700K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
WS-7222 22"	2700K 90	BN Brushed Nickel	30.5W	2119	1559	Yes
	2700K 90	BR Brushed Brass	30.5W	2119	1559	Yes
	2700K 90	CH Chrome	30.5W	2119	1559	Yes

Example: **WS-7222-BN**

- For 277V special order, add an "F" before the finish: WS-7230F-30-BN
- For alternate color temperature, special order adding -27 or -35: WS-7230F-30-BN

### DESCRIPTION

Updated with a warm brass finish, Elementum brings unparalleled task lighting into your bathroom, whether mounted vertically on either side of the mirror or above a vanity mirror for a flattering diffuse illumination.

### FEATURES

- A streamlined luminaire sealed to meet healthcare facility requirements
- 13" can only be mounted vertically
- Title 24 may not be available for all finishes, check for availability
- ACLED driverless technology
- 5 year warranty

### SPECIFICATIONS


Color Temp:	2700K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	80000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant Wet Location Listed
Construction:	Aluminum hardware with mouth blown etched glass diffuser

### REPLACEMENT PARTS


RPL-GLA-7213 - Glass for WS-7222



### FINISHES

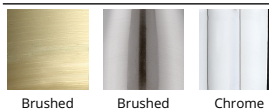

### LINE DRAWING

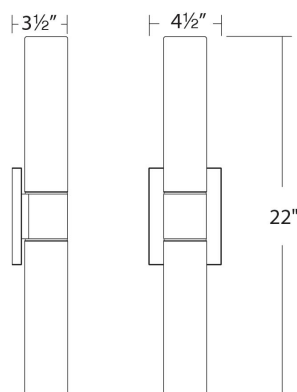

**WS-7222**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Elementum Bathroom Sconce 2700K

Model & Size	Color Temp & CRI	Finish	Watt	LED Lumens	Delivered Lumens	Title 24
WS-7230 30"	2700K 90	BN Brushed Nickel	39.5W	2404	1708	Yes
	2700K 90	BR Brushed Brass	39.5W	2404	1708	Yes
	2700K 90	CH Chrome	39.5W	2925	1955	No

Example: **WS-7230-BN**

- For 277V special order, add an "F" before the finish: WS-7230F-30-BN
- For alternate color temperature, special order adding -27 or -35: WS-7230F-30-BN

### DESCRIPTION

Updated with a warm brass finish, Elementum brings unparalleled task lighting into your bathroom, whether mounted vertically on either side of the mirror or above a vanity mirror for a flattering diffuse illumination.

### FEATURES

- A streamlined luminaire sealed to meet healthcare facility requirements
- 13" can only be mounted vertically
- Title 24 may not be available for all finishes, check for availability
- ACLED driverless technology
- 5 year warranty

### SPECIFICATIONS


Color Temp:	2700K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%
Rated Life:	80000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant Wet Location Listed
Construction:	Aluminum hardware with mouth blown etched glass diffuser

### REPLACEMENT PARTS


RPL-GLA-2818 - Glass for WS-7230



### FINISHES

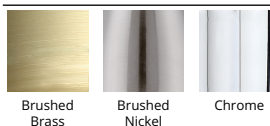

### LINE DRAWING

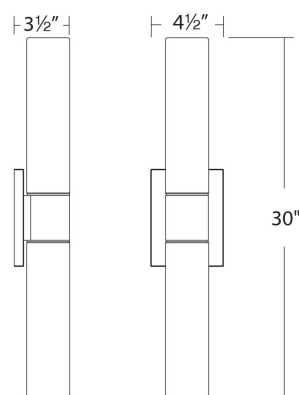

**WS-7230**