

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bandeau Outdoor Wall Sconce

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-W21110 10"	3000K 90	8W	600	180	BK Black
	3500K 90	8W	600	192	
	4000K 90	8W	600	180	

Example: **WS-W21110-30-BK**

DESCRIPTION

Just the right bandwidth to stream illumination

FEATURES

- Silk screen mitered tempered glass diffuser
- 3CCT (3000K/3500K/4000K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	4000K, 3500K, 3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65, Title 24: 2019 Wet Location Listed
Construction:	Aluminum body, glass diffuser



REPLACEMENT PARTS


- RPL-GLA-21110-OUT - Outer Glass
- RPL-GLA-21110-IN - Inner Glass

FINISHES



Black

LINE DRAWING

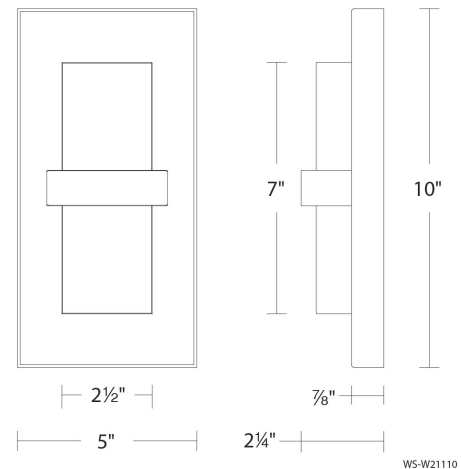

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bandeau Outdoor Wall Sconce

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-W21116 16"	3000K 90	17W	1200	465	BK Black
	3500K 90	17W	1200	494	
	4000K 90	17W	1200	464	

Example: **WS-W21116-30-BK**

DESCRIPTION

Just the right bandwidth to stream illumination

FEATURES

- Silk screen mitered tempered glass diffuser
- 3CCT (3000K/3500K/4000K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	4000K, 3500K, 3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65, Title 24: 2019 Wet Location Listed
Construction:	Aluminum body, glass diffuser

REPLACEMENT PARTS

RPL-GLA-21116-OUT - Outer Glass
RPL-GLA-21116-IN - Inner Glass




FINISHES



Black

LINE DRAWING

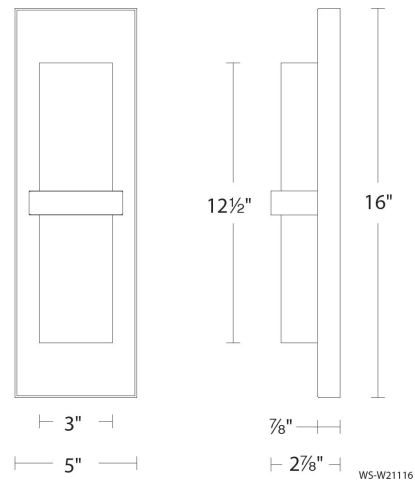

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Bandeau Outdoor Wall Sconce

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-W21122 22"	3000K 90	20W	1600	697	BK Black
	3500K 90	20W	1600	734	
	4000K 90	20W	1600	702	

Example: **WS-W21122-30-BK**

DESCRIPTION

Just the right bandwidth to stream illumination

FEATURES

- Silk screen mitered tempered glass diffuser
- 3CCT (3000K/3500K/4000K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	4000K, 3500K, 3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, IP65, Title 24: 2019 Wet Location Listed
Construction:	Aluminum body, glass diffuser



REPLACEMENT PARTS

- RPL-GLA-21122-OUT - Outer Glass
- RPL-GLA-21122-IN - Inner Glass

FINISHES



Black

LINE DRAWING

