

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Parallax Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-73129 29"	3000K 90	37W	2071	1302	AB Aged Brass BK Black BN Brushed Nickel

Example: **PD-73129-AB**

### DESCRIPTION

Effortlessly deliberate. Unparalleled..

### FEATURES

- Rotatable light bar to create desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on slope ceiling
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24: 2019 Damp Location Listed
Construction:	Aluminum body, PC diffuser

### REPLACEMENT PARTS


- RPL-ROD-IN06-AB - Rod
- RPL-ROD-IN06-BK-01 - Rod
- RPL-ROD-IN06-BN2-1 - Rod
- RPL-ROD-IN12-AB - Rod
- RPL-ROD-IN12-BK-01 - Rod
- RPL-ROD-IN12-BN2-1 - Rod
- RPL-ROD-IN06-AB - 6" rod - AB finish
- RPL-ROD-IN06-BK-01 - 6" rod - BK finish
- RPL-ROD-IN06-BN2-1 - 6" rod - BN finish
- RPL-ROD-IN12-AB - 12" rod - AB finish
- RPL-ROD-IN12-BK-01 - 12" rod - BK finish
- RPL-ROD-IN12-BN2-1 - 12" rod - BN finish



### FINISHES

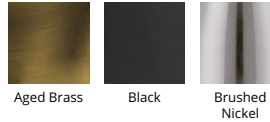

### LINE DRAWING

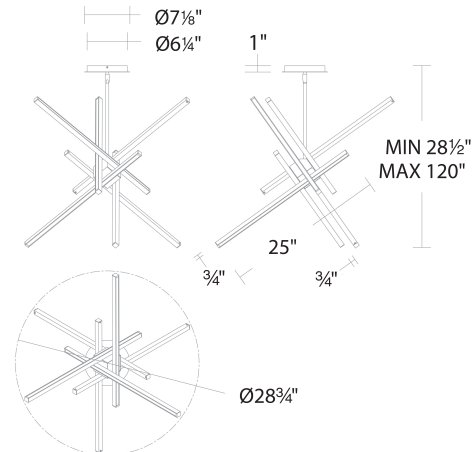

PD-73129

# WAC LIGHTING

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Parallax Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-73139 39"	3000K 90	42W	2265	1523	AB Aged Brass BK Black BN Brushed Nickel

Example: **PD-73139-AB**

### DESCRIPTION

Effortlessly deliberate. Unparalleled..

### FEATURES


- Rotatable light bar to create desired look
- Three 12" and one 6" downrods included (additional downrods available)
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on slope ceiling
- Driver concealed within the canopy
- 5 year warranty

### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24: 2019 Damp Location Listed
Construction:	Aluminum body, PC diffuser

### REPLACEMENT PARTS


- RPL-ROD-IN06-AB - Rod
- RPL-ROD-IN06-BK-01 - Rod
- RPL-ROD-IN06-BN2-1 - Rod
- RPL-ROD-IN12-AB - Rod
- RPL-ROD-IN12-BK-01 - Rod
- RPL-ROD-IN12-BN2-1 - Rod
- RPL-ROD-IN06-AB - 6" rod - AB finish
- RPL-ROD-IN06-BK-01 - 6" rod - BK finish
- RPL-ROD-IN06-BN2-1 - 6" rod - BN finish
- RPL-ROD-IN12-AB - 12" rod - AB finish
- RPL-ROD-IN12-BK-01 - 12" rod - BK finish
- RPL-ROD-IN12-BN2-1 - 12" rod - BN finish

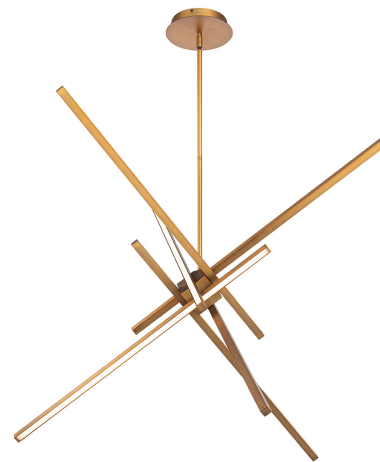

### FINISHES

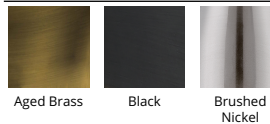

### LINE DRAWING

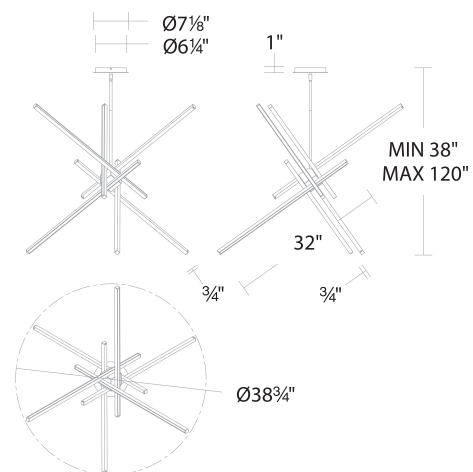

PD-73139