

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Tube Pendant Downlight Ceiling Mount 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-W2605 5"	3000K 90	16W	800	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White

Example: **PD-W2605-AL**

DESCRIPTION

Precision engineered using advanced proprietary LED technology with a built-in reflector. An appealing cylindrical profile with powerful LED lighting is perfect for accent down lighting applications. Five architectural metallic finishes offered.

FEATURES


- Hang-straight swivel
- Three 12" and one 6" down rods included
- Title 24 may not be available for all finishes, check for availability
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast Aluminum
Power:	16W
Input:	120 VAC, 120-277 VAC, 50/60Hz
Dimming:	ELV: 100-10%, 0-10V: 100-5%
Light Source:	Integrated LED
Rated Life:	70000 Hours
Mounting:	Mounts directly to junction box
Finish:	Electrostatically Powder Coated Brushed Aluminum, Black, Bronze, Graphite, White
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8-2016 Compliant, Title 24:



FINISHES

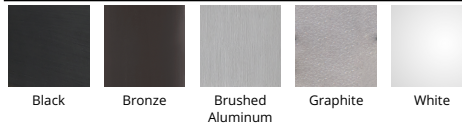

LINE DRAWING

