

WAC LIGHTING

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Boxi Wall Sconce

| Model & Size | Color Temp & CRI | Watt | LED Lumens | Delivered Lumens | Finish |
|--------------|------------------|------|------------|------------------|--|
| WS-45105 5" | 2700K 90 | 6W | 243 | 19 | AB Aged Brass BK Black BN Brushed Nickel WT White |
| | | 6W | 243 | 27 | |
| | | 6W | 243 | 28 | |
| | | 6W | 243 | 97 | |
| | 3000K 90 | 6W | 288 | 21 | |
| | | 6W | 288 | 29 | |
| | | 6W | 288 | 31 | |
| | | 6W | 288 | 118 | |
| | 3500K 90 | 6W | 279 | 19 | |
| | | 6W | 279 | 27 | |
| | | 6W | 279 | 29 | |
| | | 6W | 279 | 111 | |

Example: **WS-45105-27-AB**

DESCRIPTION

Utilitarian indirect illumination. Elevate the space.

FEATURES


- Up and downlight illumination
- 3CCT (2700K/3000K/3500K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


| | |
|----------------------|--|
| Color Temp: | 3500K, 3000K, 2700K |
| Input: | 120 VAC, 50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10%, TRIAC: 100-10% |
| Rated Life: | 54000 Hours |
| Mounting: | Can be mounted on wall in all orientations |
| Standards: | ETL, cETL |
| | Damp Location Listed |
| Construction: | Steel body, glass diffuser |



FINISHES

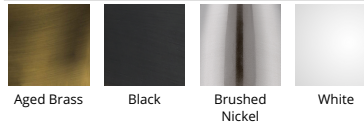

LINE DRAWING

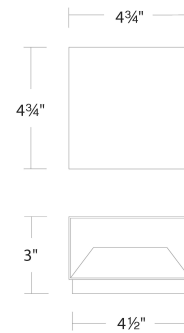

WS-45105