

WAC LIGHTING

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

BLAZE 6" Square Remodel Downlight

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R6DSDR	F 55°	9CS 2700K/3000K/3500K /4000K/5000K - 90	2060	2340	WT White

Example: **R6DSDR-F9CS-WT**

DESCRIPTION

Minimum profile downlight with metal conduit and driver included for easy remodel or new construction installation.

FEATURES

- 5-CCT Switchable between 2700K and 5000K
- Sold as remodel, but new construction frame available
- Metal Conduit with Quick Connect to allow for easy installation
- Driver included
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast Aluminum with 20-gauge Cold Rolled Steel Driver Box
Power:	25W
Input:	120-277 VAC, 50/60Hz
Dimming:	TRIAC: 100-5%, ELV: 100-10%
Light Source:	Integrated LED
Lens:	Frosted TIR lens
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Cut Out:	5 1/2"
Finish:	Electrostatically Powder Coated White
Ceiling Thickness:	1/2" - 1 1/2"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2016 Compliant, IC, Airtight




FINISHES



White

LINE DRAWING

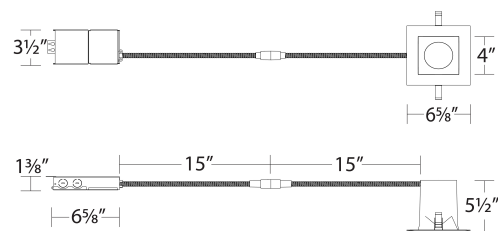

WAC LIGHTING

Fixture Type: _____


Catalog Number: _____

Project: _____

Location: _____

BLAZE 6" Square Remodel Downlight

ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	R6DRDN-FRAME	<i>BLAZE 6"</i>	