

# ADJUSTABLE WALL WASH – 5028W

H/L/J Track Luminaire

# WAC LIGHTING




Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

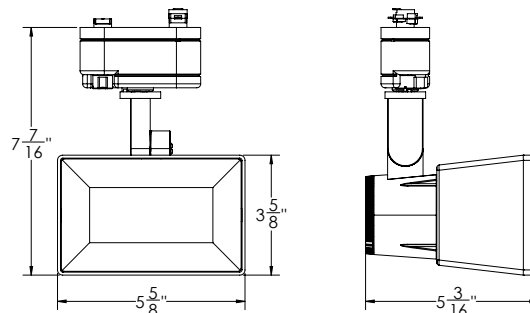

## PRODUCT DESCRIPTION

With the ability to achieve beam distributions of 3x4 to 5x6 (46° by 70° to 100° by 120° NEMA distribution) proportions and more, expect a uniform beam wash of light in a fixture that can adapt to changing needs. A powerhouse all-in-one unit in 120V provides the ability of rotating fixture head for vertical distribution and the ability to be dimmed, while being compatible with a range of lens and anti-glare accessories.

## FEATURES

- Continuously adjustable beam angles from 46° by 70° to 100° by 120° (NEMA 3x4 to NEMA 5x6)
- Rotate fixture head for vertical distribution
- 365° horizontal aiming and 90° vertical aiming
- Accommodates one lens and one glare control accessory
- Solid corrosion resistant aluminum alloy
- Patents Pending
- 50,000 hour rated life
- 5-year WAC Lighting product warranty

## SPECIFICATIONS

- Construction:** Die-cast aluminum
- Power Consumption:** 28W
- Input:** 120V AC 50/60Hz
- Light Source:** High output LED
- Dimming:** Electronic Low Voltage (ELV) 100% - 5%
- Finish:** Powder coated
- Standards:** ETL & cETL Listed, Title 24 JA8-2016 Compliant

## ORDER NUMBER

System	Model	Color Temp	CRI	Lumens	Finish
<b>H</b> H TRACK	<b>5028W</b>	<b>927</b> 2700K	90	1925	<b>BK</b> Black <b>WT</b> White
<b>L</b> L TRACK		<b>930</b> 3000K	90	2000	
<b>J</b> J/J2 TRACK		<b>935</b> 3500K	90	2025	
		<b>940</b> 4000K	90	2070	

**-5028W-930-**

Example: **H-5028W-930-BK**

## GLARE CONTROL ACCESSORIES

	<b>5028-SHR-BK</b> <b>5028-SHR-WT</b> <b>5028-SHR-PT</b>
	<b>5028-HSHR-BK</b> <b>5028-HSHR-WT</b> <b>5028-HSHR-PT</b>
	<b>5028-VSHR-BK</b> <b>5028-VSHR-WT</b> <b>5028-VSHR-PT</b>

## LENS ACCESSORIES

Amber	<b>4LENS-3X5-AMB</b>	Frosted Spread Beam Elongating	<b>4LENS-3X5-FR</b> <b>4LENS-3X5-SPR</b> <b>4LENS-3X5-BEL</b>
Blue	<b>4LENS-3X5-BLU</b>		
Green	<b>4LENS-3X5-GRN</b>		
Red	<b>4LENS-3X5-RED</b>		

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050


Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# ADJUSTABLE WALL WASH – 5028W

H/L/J Track Luminaire

# WAC LIGHTING

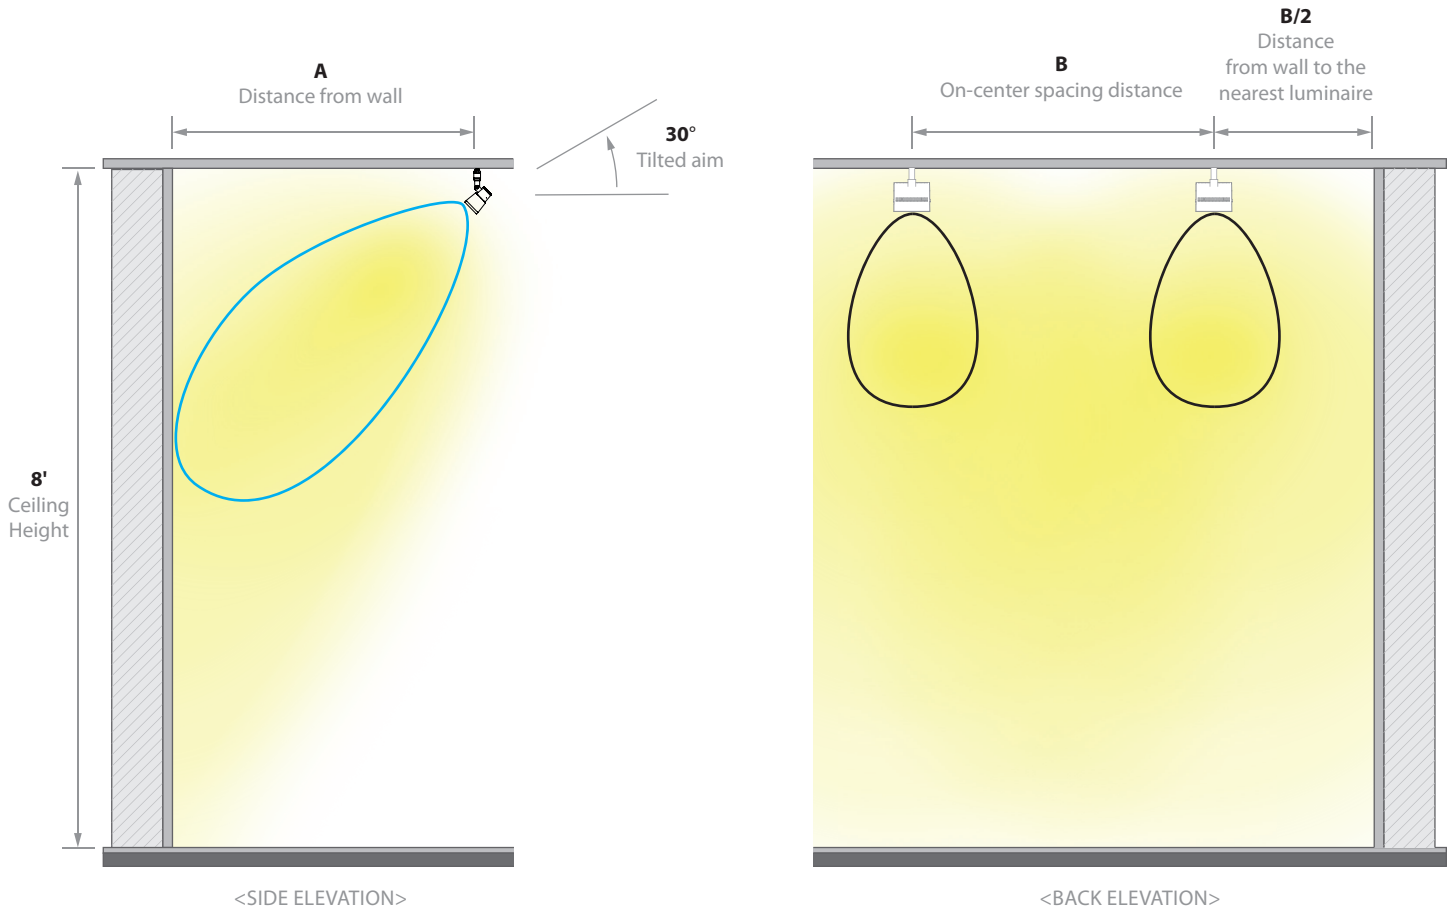


## AVERAGE WALL ILLUMINANCE

Horizontal	A Distance from wall	B On-center spacing distance	
		3 feet	5 feet
3X4	3 feet	16	10
	5 feet	12	7.6
4X5	3 feet	30	19
	5 feet	23	15
5X6	3 feet	41	26
	5 feet	32	21

Vertical	A Distance from wall	B On-center spacing distance	
		3 feet	5 feet
3X4	3 feet	16	9.83
	5 feet	12	7.47
4X5	3 feet	28	18
	5 feet	22	14
5X6	3 feet	38	24
	5 feet	30	19

## PHOTOMETRY

Shown when fixture is aimed towards the ground (nadir)



Results may vary depending on surface properties, ambient light levels, etc.

**WAC Lighting**  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

**Western Distribution Center**  
1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585